


KR 203P Attaching System



The KR 203P attaches a wide variety of cards and pre-packaged samples onto various mailers and inserts.



An affordable alternative to high priced systems, the KR 203P is designed for mailing/packaging operations requiring **ease of use, durability and versatility**. A straightforward and trouble-free design **reduces operator training and setup time**. Ideally suited for short run jobs, the KR 203P is long run capable as well. Precision manufactured components, heavy-duty construction and traditional craftsmanship results in a truly **rugged and dependable system** capable of handling a wide range of material.

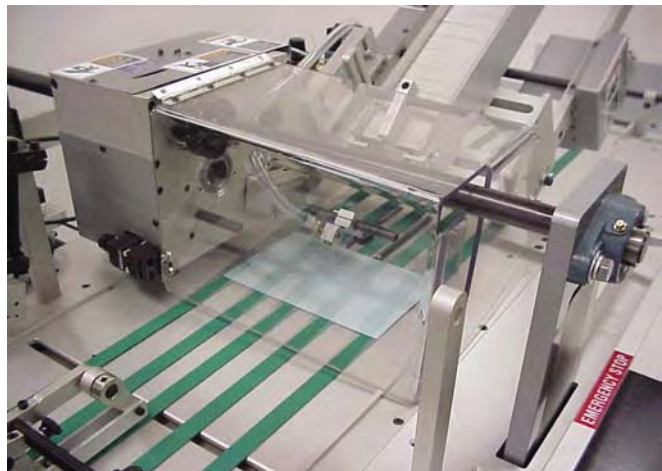

Samples are accurately placed and quick-setting hot melt adhesive secures them in position. Where appropriate, peel-away adhesives permit sample removal and are easy to clean up.

KR 203P

Attaching system

General Specifications

Electrical Requirements

215 feed base 220 VAC, 20 amps, 60HZ
 Hot melt system 120 VAC, 20 amps, 60HZ
 Shingle conveyor Connects electrically to feed base

Compressed Air - 1 cfm @ 40 psi

Maximum cycle speed – 100 cycles/minute

KR 215 Feed Base

Physical

Length	75"	190 cm
Height	43"	109 cm
Width	34"	86 cm

Material Handling

Feeder Type	Vacuum shuttle	
Minimum	3"W X 5"L	76 mm X 127mm
Maximum	17"W x 14"L	432 mm X 355mm
Thickness	5/8"	15 mm
Stop pin adjustment	8"	20 cm

KR 203P Head

Physical

Feeder Type	Swing arm, suction cup assembly	
Length	38"	97 cm
Height	22"	56 cm
Width	20"	50 cm

Material Handling

Minimum	2.75"W x 1"L	70mm X 25mm
Maximum	7.75"W x 5" L	197mm X 127mm
Thickness	1/4"	6.4mm

KR 314 Shingle Conveyor

Physical

Length	6', 8', 12' or 18'	2m, 2.6m, 4m or 6m
Height	30"	76 cm
Width	16"	41 cm

Delivery Type Right angle (standard), inline

STS 25-2H Hot Melt System


Physical

Length	30"	76 cm
Height	18" (mounting stand is 32" tall)	102 cm
Width	20"	51 cm
Tank Capacity	25 lb	11 kg

Qualified Adhesives

HB Fuller Co. # HL-2198	800.468.6358
Evans Adhesives # 07523-000-EZ	800.888.0925
The Reynolds Co. # HM 51-629	800.232.6791

Specifications subject to change without notification
 Guards have been removed for clarity. Do not operate machine without guards in place.

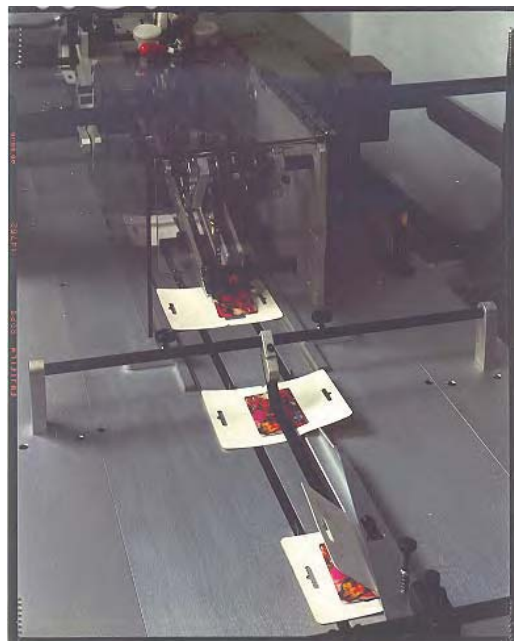

Optional plow fold stations and other customized solutions means increased versatility.



Optional dual hopper kit



Ph. 888-584-7272

Visit us on the web: www.peak.bz