

Packaging Series Streamfeeder LX-12


Overview

The new LX-12 is packed with unique features that make it the best value in the marketplace today! Tool-less, quick make ready adjustments and versatility makes this the perfect entry level packaging feeder for operations pursuing increased productivity at an affordable price.

Feed a wide variety of flat and multi-thickness products into shrink wrappers, poly baggers, banders, collators, case packers, boxes, and more. Operates on-demand: one at a time or in batch sets up to 99 pieces.

Standard Features

Repositionable feed belts • Independent side guide positioning • Extended guide rails into the discharge to keep products traveling straight • Two independent separators that can be easily repositioned throughout the width of the feeder and positioned on or off the belt for product separation • Tool-less discharge angle adjustment • Self-adjusting discharge hold down • Variable speed control • Batch counting capabilities • Miss-detect fault output • Timeout stop • High performance photo sensors • Two-wire host interface

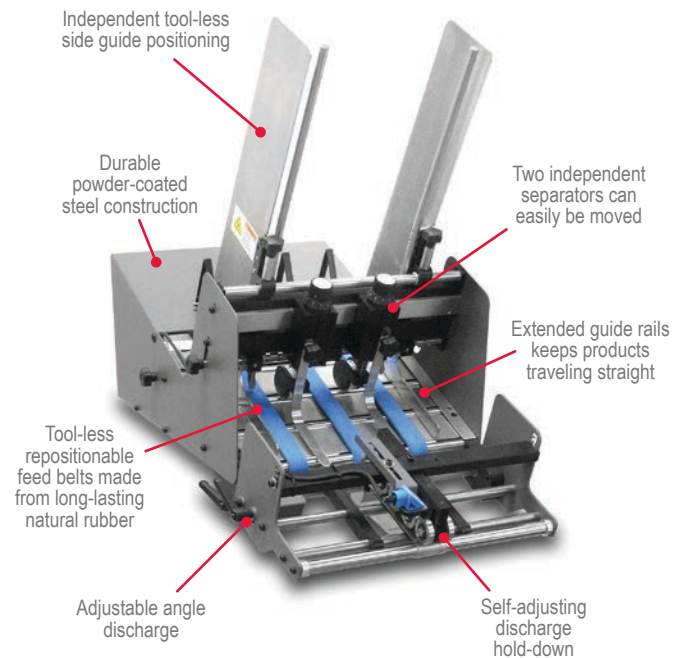

Applications *(ask us about your application)*

Shrink Wrappers	Cartoners	Poly Baggers
Order Fulfillment	Case Packers	Insert Open Track
Flow Wrappers	Collators	

Products *(ask us about your products)*

Sheet Paper	Cardstock	Backer Board
Envelopes	Folded Documents	Booklets
Manuals	Retail Signage	Literature Kits
Brochures	Folders	Collapsed Cartons

Specifications

Maximum Product Size	12 W x 18 L in (305 x 457 mm)
Minimum Product Size	2.5 W x 3 L in (64 x 76 mm)
Min/Max Product Thickness	.003 - 1.0 in (.076 - 25.4 mm)
Belt Speed	4000 in/min (101.6 m/min)
Batch Size	1-99
Utilities	115/230vac, 50/60Hz, 5A
Weight	62 lbs. (28 kg)
Warranty	One year limited

Other sizes and thickness capabilities available. Contact us for your application.

FOOTPRINT DRAWING AVAILABLE AT:
www.streamfeeder.com/footprints.html
or scan the QR Code

