

Packaging Series Streamfeeder Reliant 3700EX




Overview

Designed for dependable one shot and batch count feeding, the Reliant 3700EX is ideal for on-demand feeding and collating applications for customers pursuing increased productivity and efficiency throughout their packaging and fulfillment centers. Many standard features enable the Reliant 3700EX to be adapted for a wide variety of applications.

Feed a wide variety of flat and multi-thickness products into shrink wrappers, poly baggers, banders, collators, case packers, boxes, and more. Operates on-demand one at a time or in batch sets up to 99 pieces.

Standard Features

Long lasting natural gum rubber feed belts • Vacuum assist ready
 • One-knob side guide adjust • Miss-detect fault output • Patented product separating technology • Tool-less setup and changeovers • Adjustable angle discharge • Self-adjusting discharge hold down • Variable speed control • Batch counting capabilities • Timeout stop • High-performance photo-sensors • Two-wire host interface • Alarm alert with reset

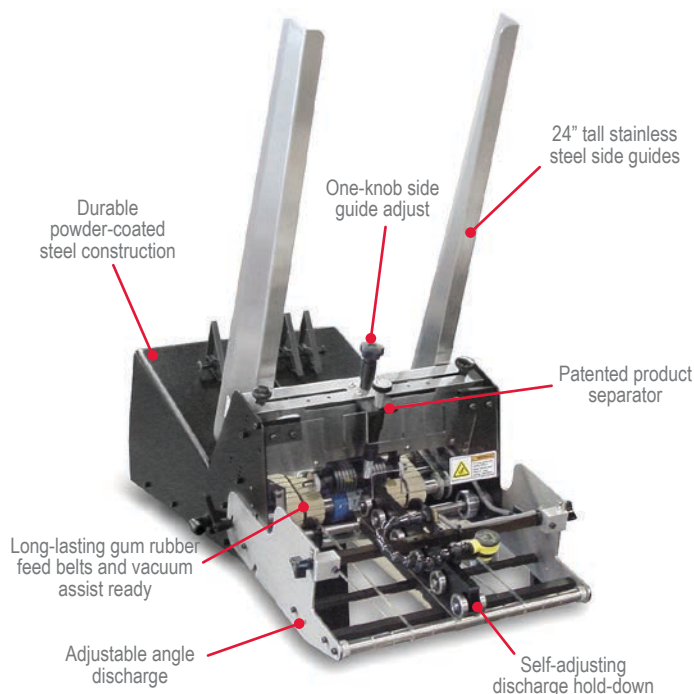

Applications *(ask us about your application)*

Shrink Wrappers	Flow Wrappers	Inserter Open Track
Poly-baggers	Cartoners	Collators
Case Packers	Order Fulfillment	

Products *(ask us about your products)*

Sheet Paper	Backer Board	Folded Documents
Manuals	Literature Kits	Folders
Cardstock	Envelopes	Booklets
Retail Signage	Brochures	Collapsed Cartons
and more...		

Specifications

Maximum Product Size	12 W x 14 L in (305 x 356 mm)
Minimum Product Size	2 W x 2.5 L in (54 x 64 mm)
Min/Max Product Thickness	.003 - 1.00 in (.076 - 25.4 mm)
Belt Speed	4800 in/min (122 m/min) or 120 cycles/min
Batch Size	1-99
Utilities	115/230vac, 50/60Hz, 3A
Weight	75 lbs. (34 kg)
Warranty	One year limited

Other sizes and thickness capabilities available. Contact us for your application.

FOOTPRINT DRAWING AVAILABLE AT:
www.streamfeeder.com/footprints.html
 or scan the QR Code

